


ONE HEAD PNEUMATIC APPLICATOR

Professional solution for snap buttons and punching holes



- Application of snap buttons , eyelets and rivets.Punching holes in fabrics,pvc or cardboard
- Pneumatic head with a cylinder featuring millimetre-precision stroke adjustment
- Ideal for fabrics, leather, pvc sheets and cardboard
- Compatible with standard dies supplied by button manufacturers

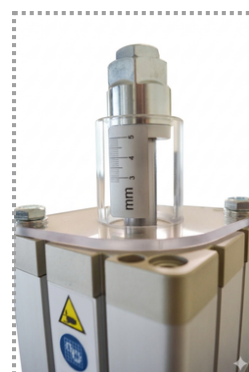

TECHNICAL SPECIFICATIONS PRS

Product description	Single-head, manually loaded pneumatic machine for applying snap buttons and small parts in general, complete with hand guard.
Maximum force developed at 8 bar	520 kg
Cylinder specifications	ISO diam. 100 with stroke adjustment
Cylinder stroke	50 mm -adjustable up to 30 mm
Air consumption per cycle	2,75 N/l
Working pressure	adjustable from 3 to 8 bar
Type of start up	pneumatic pedal
Throat depth	110 mm
Distance between tool holders	85 mm
Technical specifications of the upper tool holder	1/4-inch 24-thread
Technical specifications of the lower tool holder	diam.12,2 mm
Processing time	3-4 sec
Suitable for	iron,brass,aluminium,steel,plastic
Max.diam.of small parts that can be processed	24 mm
Safety	adjustable hand protection system
Standard equipment	1 double-ended spanner, 4 feet, 1 button container, 1 centring device,1 allen key 3mm
Customisation	option to manufacture custom-designed tool holders on request
Suitable setting tools	compatible with standard dies supplied by button manufacturers
Bench height adjustment	yes
Operating area height	92 - 102 cm
Optionals	red light led positioning device (point or cross) distance reference guide tool holder panel work table with reference stops pneumatic timer for extending the pressing time approaching device
Warranty duration	12 months
Certification	CE labeling

DIMENSIONS AND LOGISTICS

Dimensions	Net weight	Packaging dimensions	Gross weight	Type of packaging	Packaging modality
53X56X150-160 cm	44 kg	90X45X64 cm	55 kg	cardboard boxes on pallet	disassembled bench